

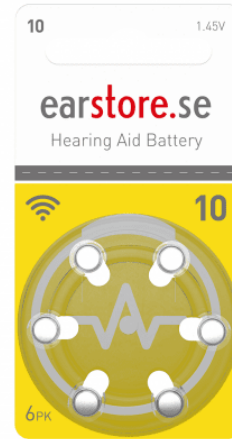


Typical IEC/ANSI Standard Discharge Performance

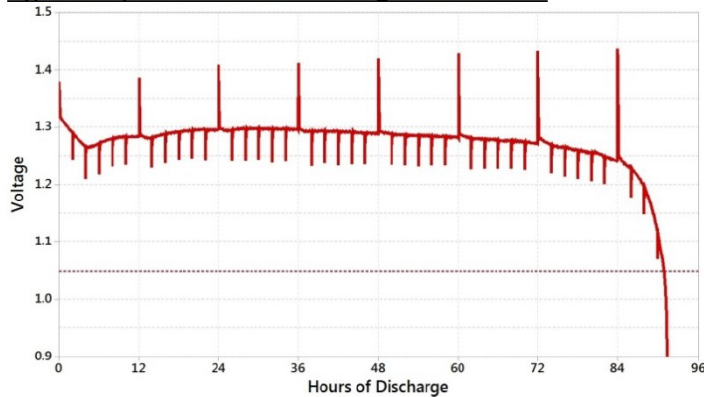


Article number	RA-10AU-6EARSTO
Name	Earstore size 10 Yellow Hearing Aid Battery
Cell Chemistry	Zinc Air
Recommended Use	Hearing Aid Instruments
Nominal Voltage	1.45 volts
Designation	IEC : PR70 ANSI : 7005ZD Common : 10
Weight	0.31 grams (0.011 oz)
Volume	0.08 cc (0.005 cu. in.)
Operating Temperature Range	-10° C to 50° C (14° F to 122° F)
Impedance	< 9.0 ohm @ AC 1000 Hz
Hearing Aid	136 hours – 0.7 mA background, 3 mA 100 ms pulse, once every 2 h, 12 h/d to 1.05V at 21°C(70°F) and 50% R.H.
IEC/ANSI Standard	90 hours – 1 mA background, 5 mA 100 ms pulse, once every 2 h, 12 h/d to 1.05V at 21°C(70°F) and 50% R.H.
IEC/ANSI High Drain	55 hours – 1.5 mA background, 5 mA 15 min pulse, every h, 12 h/d to 1.1V at 21°C(70°F) and 50% R.H.
Storage Guarantee	Three years with tab applied when stored at 21°C (70°F).
Activation and use	Remove and discard the plastic tab covering air holes. Allow the battery to stand for one minute to insure proper activation.
Environmental	These cells have no added mercury. Refer to Rayovac Material Safety Data Sheets for more detailed information.
Compliant to the Following Standards	IEC 60086-1, IEC 60086-2 ANSI C18.1M Parts 1 & 2

Zinc Air Cell



DIMENSIONS SHOWN ARE IEC STANDARDS FOR ENGINEERING TOLERANCES CONTACT RAYOVAC.



AIR ACCESS HOLE

CE MDR 2017/745
Class 1

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.

AB Transistor Sweden | Bergkällavägen 23 | 192 79 Sollentuna | +46 (0)8 545 536 30

www.earstore.se | www.transistor.se